This Page Is Inserted by IFW Operations and is not a part of the Official Record

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.


Defects in the images may include (but are not limited to):


- BLACK BORDERS
- TEXT CUT OFF AT TOP, BOTTOM OR SIDES
- FADED TEXT
- ILLEGIBLE TEXT
- SKEWED/SLANTED IMAGES
- COLORED PHOTOS
- BLACK OR VERY BLACK AND WHITE DARK PHOTOS
- GRAY SCALE DOCUMENTS

IMAGES ARE BEST AVAILABLE COPY.

As rescanning documents will not correct images, please do not report the images to the Image Problem Mailbox.



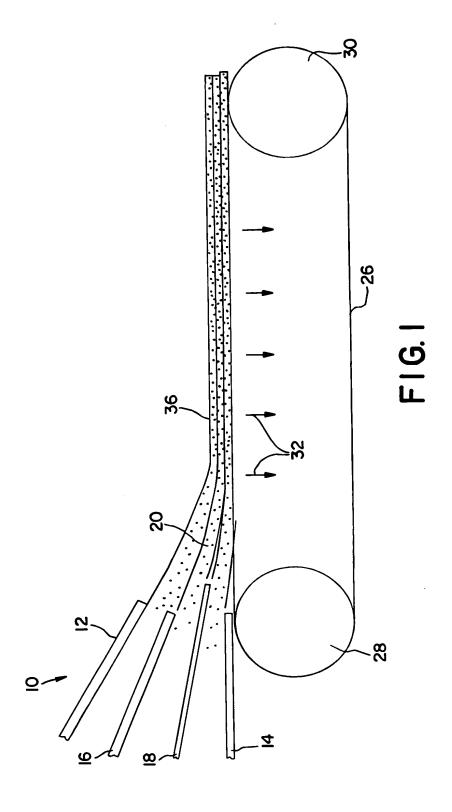

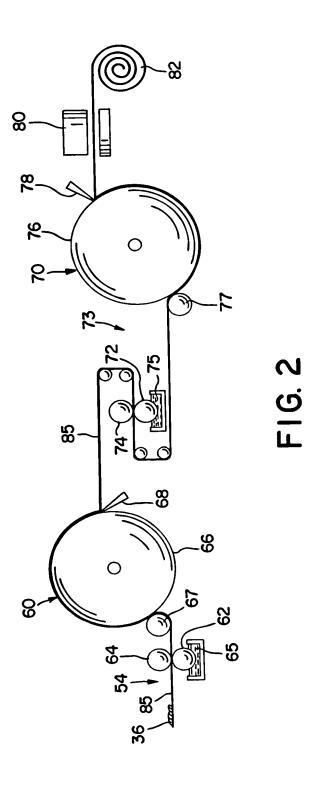

3/13

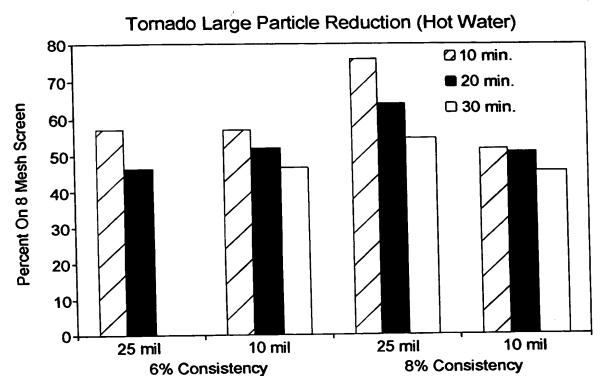


FIG. 3

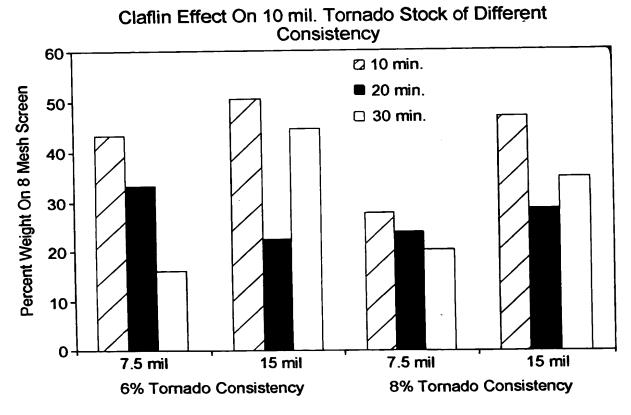


FIG. 4

4/13

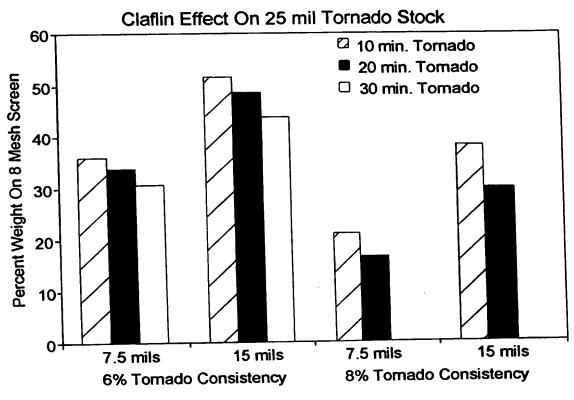


FIG. 5

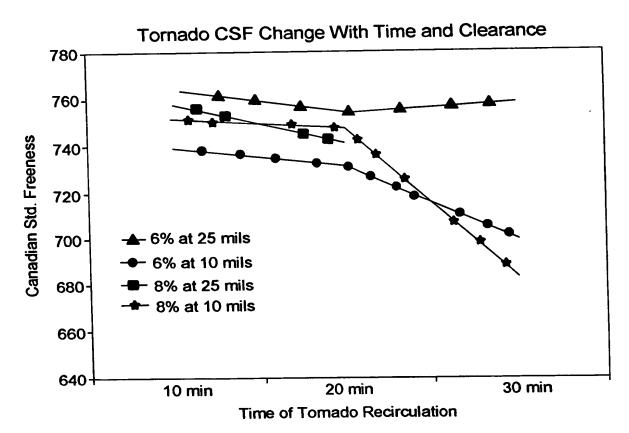


FIG. 6

5/13 Tornado Effect On CSF (6% Consistency) 780 760 Canadian Std. Freeness 740 720 700 25 mils Rotor/Stator Clearance 10 mils Rotor/Stator Clearance 680 660 30 min 20 min 10 min Recirculation Time, Minutes

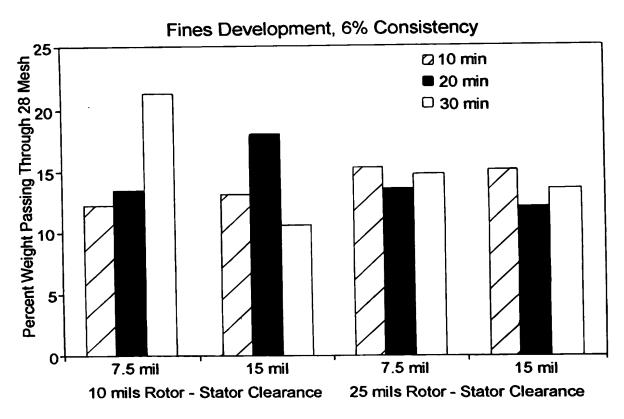


FIG. 7

FIG. 8

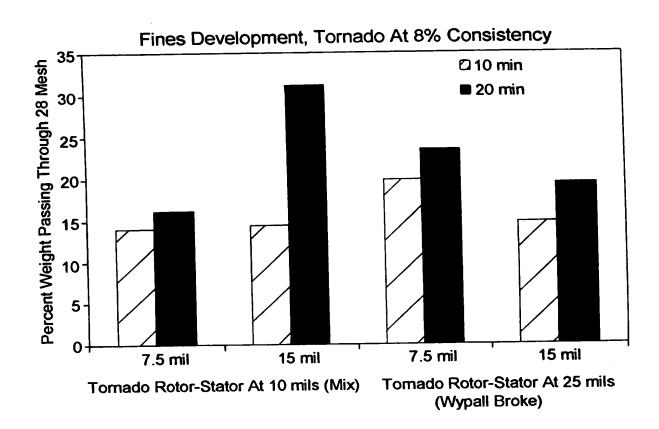


FIG. 9

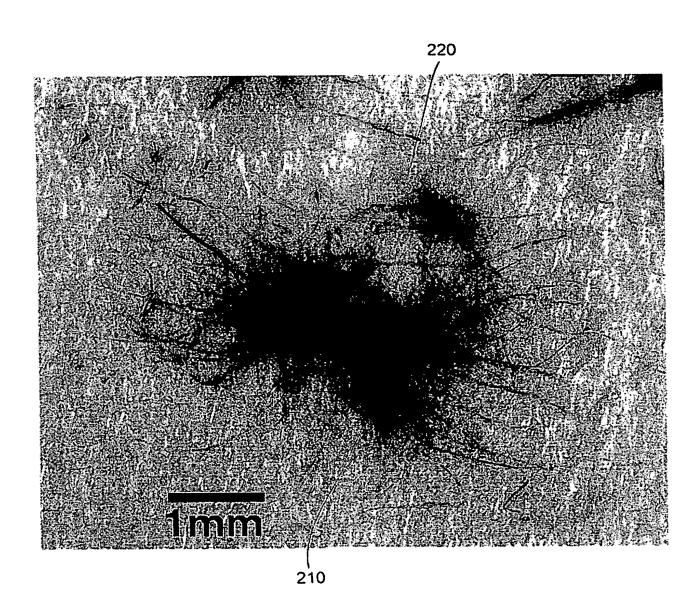


FIG. 10

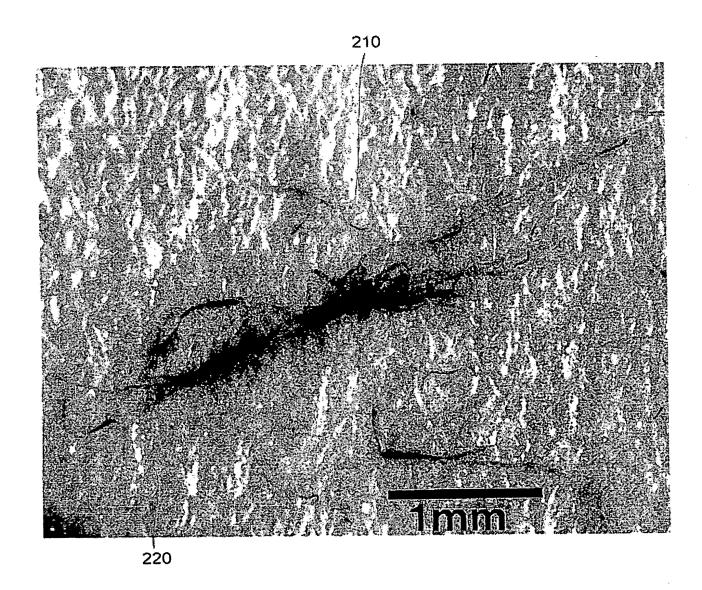


FIG. 11

